



SHIFTING THE LIMITS

FRONIUS SMART METER

/ The bidirectional meter for recording power consumption in the home



/ The Fronius Smart Meter is a bidirectional meter which optimises self-consumption and records the household's load curve. Thanks to highly accurate measurements and rapid communication via the Modbus RTU interface, dynamic feed-in control when feed-in limits are imposed is faster and more accurate than with the S0 meter. Together with Fronius Solar.web, the Fronius Smart Meter presents a clear overview of power consumption within the home. In the Fronius Energy Package storage solution based on the Fronius Symo Hybrid, the Fronius Smart Meter provides perfectly coordinated management of the various energy flows and optimises overall energy management. The Fronius Smart Meter is ideally suited for use with the Fronius Symo, Fronius Symo Hybrid, Fronius Galvo, Fronius Primo inverters and the Fronius Datamanager 2.0.


FRONIUS SMART METER

| TECHNICAL DATA | FRONIUS SMART METER 63A-3 | FRONIUS SMART METER 50kA-3 ¹⁾ | FRONIUS SMART METER 63A-1 |
|------------------------------------|---------------------------|--|---------------------------|
| Nominal voltage | 400 – 415 V | 400 – 415 V | 230 – 240 V |
| Max. current | 3 x 63 A | 3 x 50,000 A | 1 x 63 A |
| Cable cross-section, power path | 1 – 16 mm ² | 0.05 – 4 mm ² | 1 – 16 mm ² |
| Cable cross-section, communication | 0.05 – 4 mm ² | 0.05 – 4 mm ² | 0.05 – 4 mm ² |
| Installation | DIN rail | DIN rail | DIN rail |
| Housing (width) | 4 modules DIN 43880 | 4 modules DIN 43880 | 2 modules DIN 43880 |
| Measurement (mm) | 89 x 71.2 x 65.6 | 89 x 71.2 x 65.6 | 89 x 35 x 65.6 |
| Accuracy class | 1 | 1 | 1 |
| Interface to inverter | Modbus RTU (RS485) | Modbus RTU (RS485) | Modbus RTU (RS485) |
| Display | 8-digit LCD | 8-digit LCD | 6-digit LCD |


¹⁾ Delivered without current sensors, secondary current 1A and 5A. The Fronius Smart Meter 50kA-3 is available from mid 2015.

THE ADVANTAGES AT A GLANCE

- / Fast and accurate dynamic feed-in control
- / Clear overview of power consumption in Fronius Solar.web
- / Optimised energy management with the Fronius Energy Package storage solution

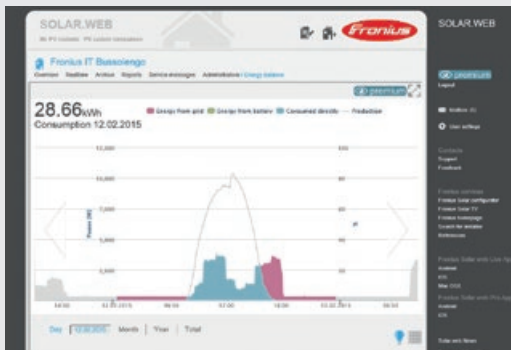

CONFIGURATION DIAGRAM

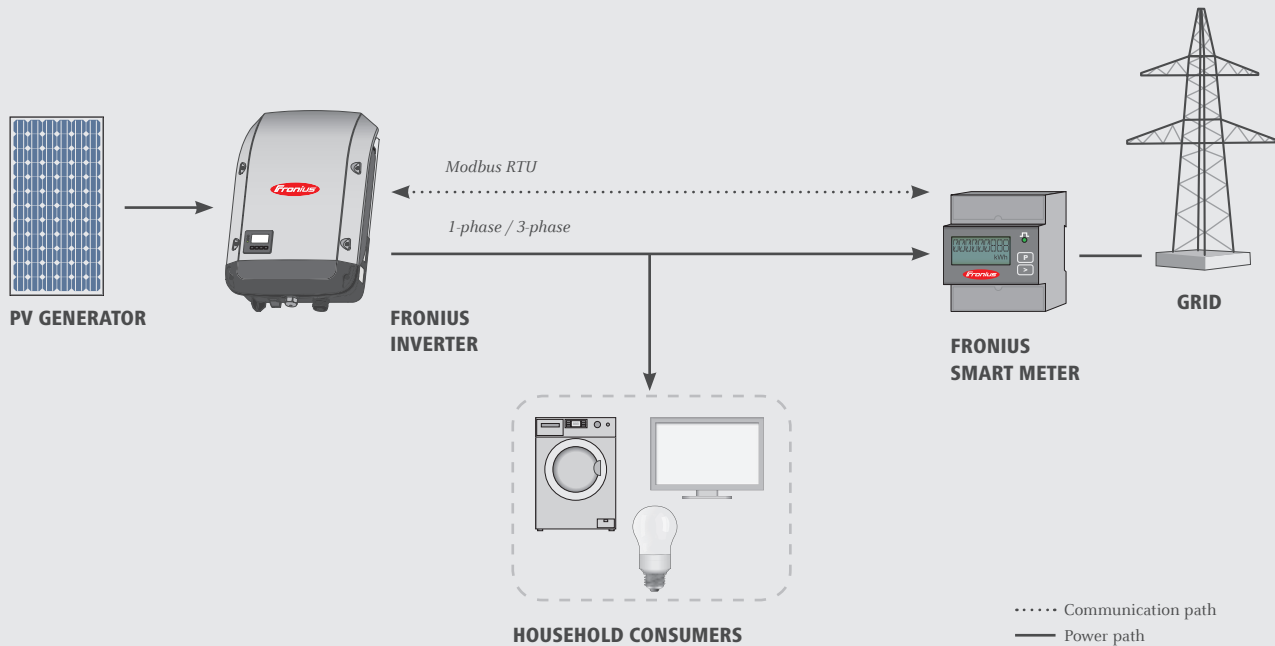

/ The Fronius Smart Meter is compatible with all inverters with an RS485 interface (Modbus RTU). The Fronius Smart Meter works in conjunction with the Fronius Datamanager 2.0 for the Fronius IG¹⁾, Fronius IG Plus and Fronius CL inverters, whereas the Fronius Datamanager Box 2.0 is used with the Fronius IG TL, Fronius Agilo and Fronius Agilo TL inverters. The Fronius Smart Meter can be retrofitted at any time together with the Fronius Datamanager 2.0 in inverters that have already been installed.

¹⁾ No power reduction possible.

/ Perfect Welding / Solar Energy / Perfect Charging

WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.

/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,300 employees worldwide, we shift the limits of what's possible - our record of over 900 granted patents is testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com

v05 May 2015 EN

Fronius India Private Limited
GAT no 312, Nanekarwadi
Chakan, Taluka - Khed District
Pune 410501
India
pv-sales-india@fronius.com
www.fronius.in

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
pv-sales-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales@fronius.com
www.fronius.com